


Flange


■ Flange

- JIS10K thin type
- JIS10K standard type
- JIS20K

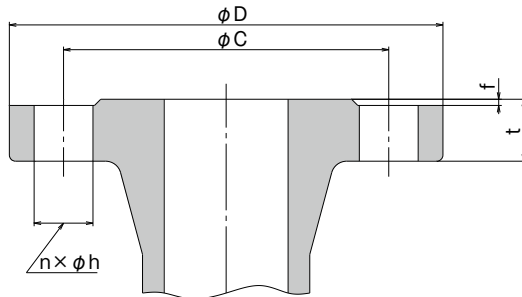

■ Companion flange (screw-in type)

- JIS10K thin type
- JIS10K standard type

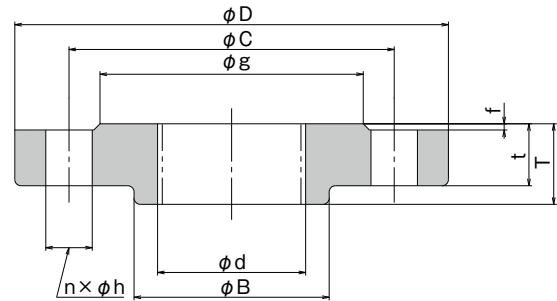

● JIS10K standard type RF

(Unit:mm)

Nominal dia.	C	D	t	f	n No. of bolts	h
32	100	135	20	2	4	19
40	105	140	20	2	4	19
50	120	155	20	2	4	19
65	140	175	22	2	4	19
80	150	185	22	2	8	19
100	175	210	24	2	8	19
125	210	250	24	2	8	23
150	240	280	26	2	8	23
200	290	330	26	2	12	23
250	355	400	30	2	12	25
300	400	445	32	3	16	25

● JIS10K thin type

(Unit:mm)

Nominal dia.	d	g	C	D	t	f	T	B	n No. of bolts	h
32	Rc1¼	80	100	135	18	2	26	55	4	15
40	Rc1½	85	105	140	18	2	26	63	4	15
50	Rc2	100	120	155	18	2	26	75	4	15
65	Rc2½	120	140	175	18	2	28	95	4	15
80	Rc3	130	150	185	18	2	28	105	8	15
100	Rc4	155	175	210	20	2	30	130	8	15
125	Rc5	185	210	250	22	2	30	160	8	19
150	Rc6	215	240	280	22	2	34	185	8	19

● JIS10K thin type RF

(Unit:mm)

Nominal dia.	C	D	t	f	n No. of bolts	h
32	100	135	18	2	4	15
40	105	140	18	2	4	15
50	120	155	18	2	4	15
65	140	175	18	2	4	15
80	150	185	18	2	8	15
100	175	210	20	2	8	15
125	210	250	22	2	8	19
150	240	280	22	2	8	19
200	290	330	24	2	12	19

● JIS10K standard type

(Unit:mm)

Nominal dia.	d	g	C	D	t	f	T	B	n No. of bolts	h
32	Rc1¼	75	100	135	20	2	26	60	4	19
40	Rc1½	85	105	140	20	2	26	63	4	19
50	Rc2	100	120	155	20	2	26	75	4	19
65	Rc2½	120	140	175	22	2	28	95	4	19
80	Rc3	130	150	185	22	2	28	105	8	19
100	Rc4	155	175	210	24	2	30	130	8	19
125	Rc5	185	210	250	24	2	30	160	8	23
150	Rc6	215	240	280	26	2	34	185	8	23

● JIS20K

(Unit:mm)

Nominal dia.	C	D	t	f	n No. of bolts	h
40	105	140	22	2	4	19
50	120	155	22	2	8	19
65	140	175	24	2	8	19
80	160	200	26	2	8	23
100	185	225	28	2	8	23
125	225	270	30	2	8	25
150	260	305	32	2	12	25
200	305	350	34	2	12	25
250	380	430	38	2	12	27
300	430	480	40	3	16	27